



AQUAPOINTE HYDRATION STATION

Technical Sheet

MWEBFY RW ■ Contactless, Non-Refrigerated

MW2EBFY RW ■ Contactless, Refrigerated

MW8EBFY RW ■ Contactless, Refrigerated

Bottle Filler

The Bottle Filling Station is perfect for those high traffic areas. With a contactless, touch-free activation - there are no fears of cross-contamination.

Designed for urban settings, the sloped top prevents trash being placed on the unit. Additionally, the powder-coat steel finish is highly-durable. This unit can be installed right against the wall to save-space. This unit can be installed right against the wall to save-space. Easily serviced with removable lower panel for quick access to filters, electronics and chiller.

The Bottle Filling Station comes as standard in white. There is ample space for potential branded wrapping to add commercial value to this unit if you so wish.


Chilled and Non-chilled models are available both with or without Quasar; our UVC LED that kills 99.99% of bacteria at the point of dispense.

The cooling system uses R-134a or R-290.

The R290 refrigerant is mandatory for countries subject to the F-Gas Directive. R134a refrigerant available for other markets.



MODEL CODE	MWEBFY RW	MW2EBFY RW	MW8EBFY RW
ACTIVATION		Contactless (Infrared sensor)	
SENSOR COVERAGE		Up to 5cm (approx.)	
FILTRATION		Optional Green Filter / VersaFilter III	
DISINFECTION		Optional Quasar UVC LED	
Auto-Off Water Flow		Yes	
FLOW RATE		4.2LPM	
DRAINAGE TYPE		Built in drain, Removable drip tray	
COLOUR		Standard White; Optional custom colours or wrapping.	
EXTERIOR		Brushed Stainless Steel	
CHASSIS		Heavy Duty Galvanised Steel	
DIMENSIONS		1505mm (H) x 700mm (W) x 350mm (D)[mm]	
ALCOVE HEIGHT		330 mm	
NET WEIGHT	49 kg	64 kg	73 kg
POWER SUPPLY		220-240V, 50/60 Hz	
COOLING PERFORMANCE	N/A	10 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
FULL LOAD AMPS	0.1 A	0.8 A	2.2 A
RATED WATTS	7 W	102 W	347 W
ENERGY SYSTEM		Refrigeration is on only when in use or if water temp increases during long period of standby.	
COUNTRY OF ORIGIN		Poland	
CERTIFICATIONS		CE (LVD, EMC, RoHS)	
WARRANTY		1 Year	

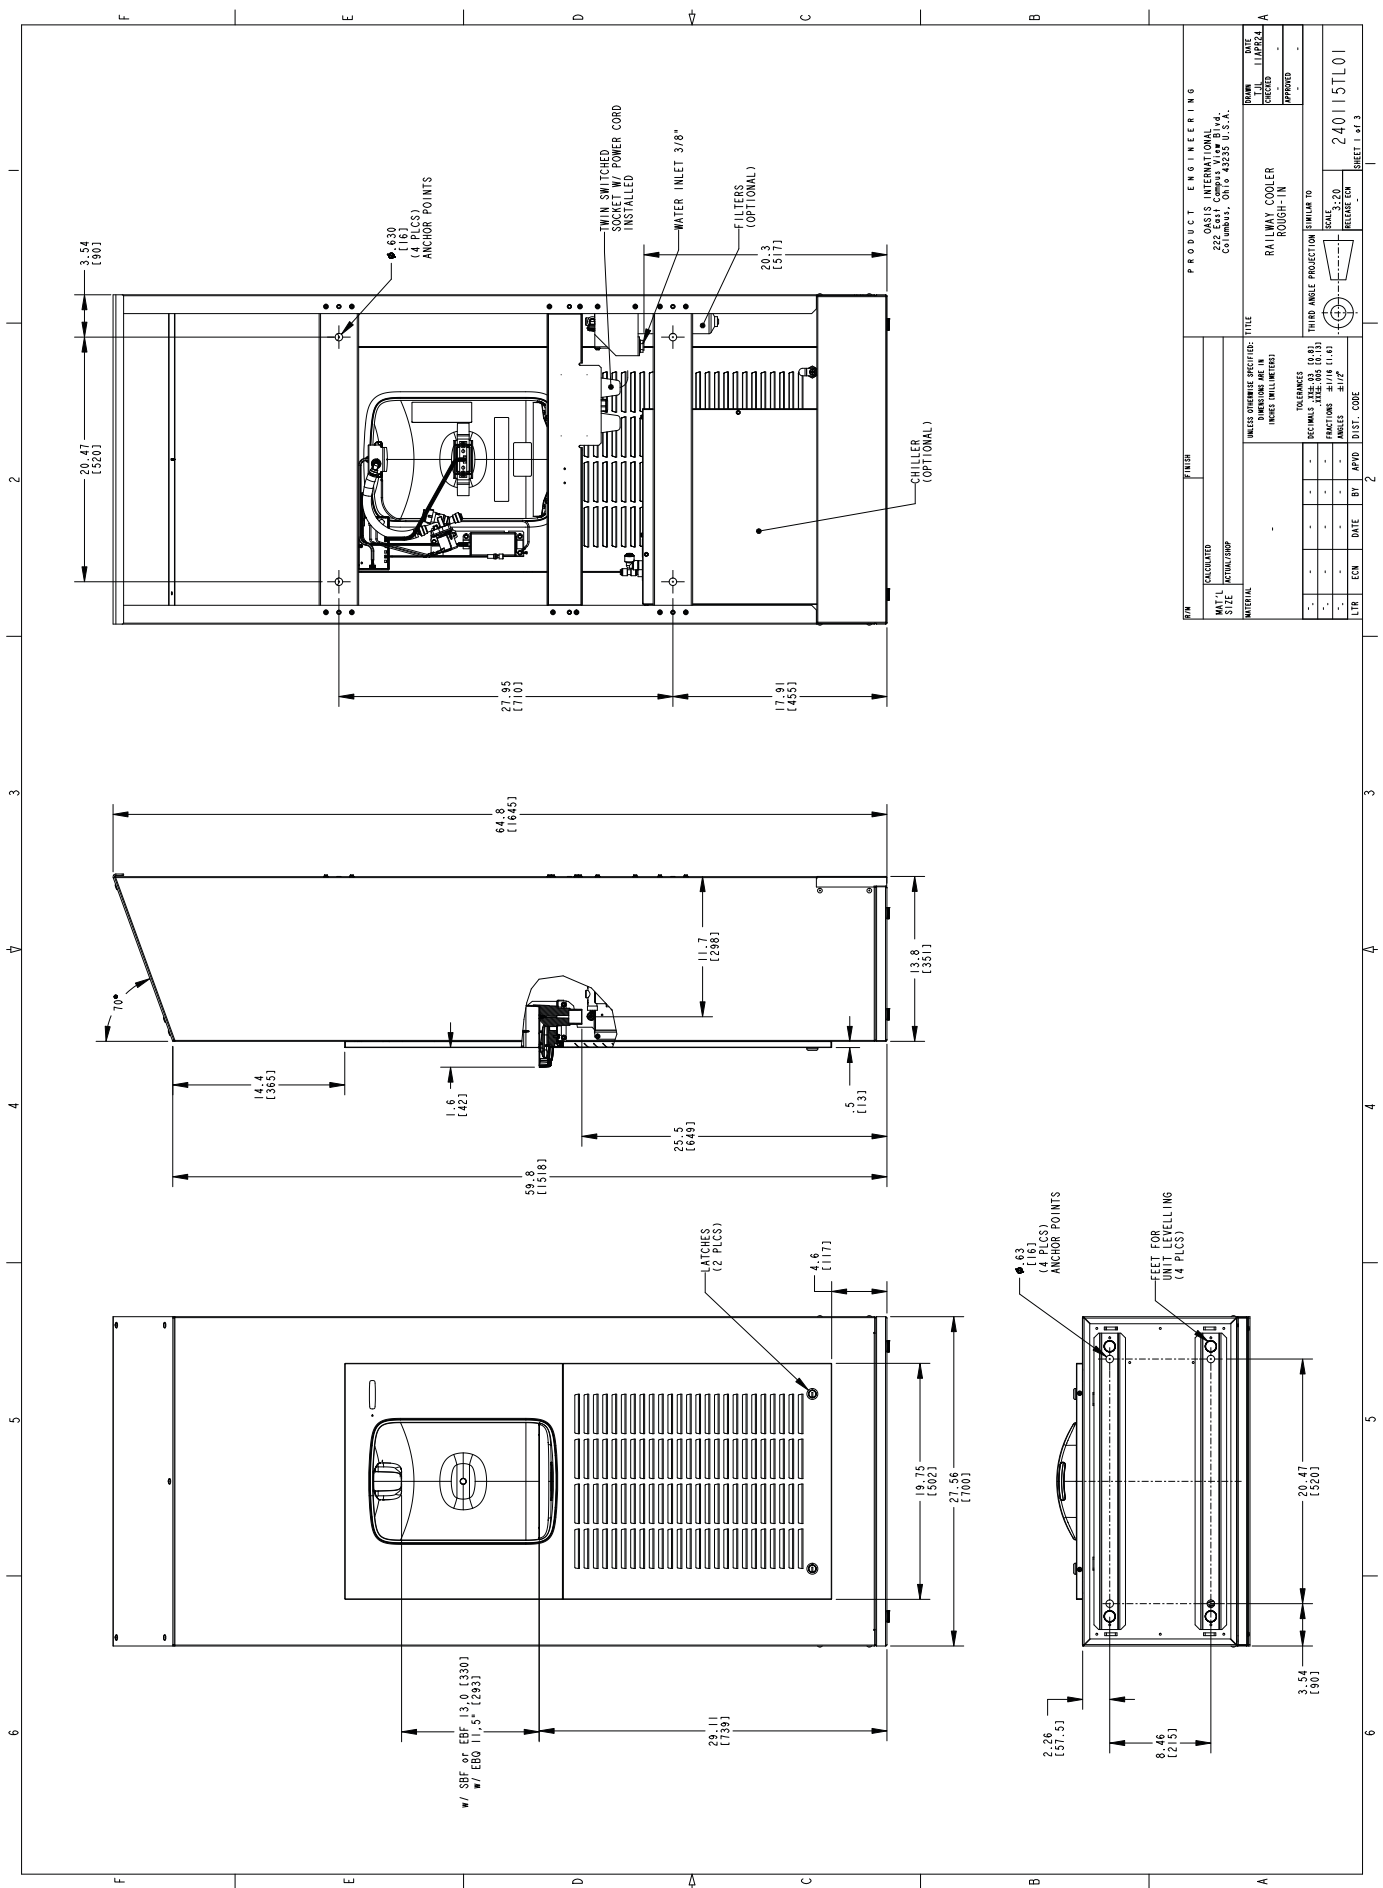

PRODUCT ENGINEERING		OASIS INTERNATIONAL		2775 S.W. 11th Ave., Suite 104, Fort Lauderdale, FL 33311, U.S.A.	
DESIGNED	BY	DATE	REVIEWED	BY	DATE
240115TL01	240115TL01	240115TL01	240115TL01	240115TL01	240115TL01
RAILWAY COOLER		RAILWAY COOLER		RAILWAY COOLER	
ROUGH-IN		ROUGH-IN		ROUGH-IN	
THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION	
TOLERANCES		TOLERANCES		TOLERANCES	
FRACTIONS		FRACTIONS		FRACTIONS	
DECIMALS		DECIMALS		DECIMALS	
ANGLES		ANGLES		ANGLES	
HATCHES		HATCHES		HATCHES	
DIMENSIONS		DIMENSIONS		DIMENSIONS	
BY		BY		BY	
DATE		DATE		DATE	
ECN		ECN		ECN	
LTR		LTR		LTR	



www.oasiswatercoolers.in
info@oasiswatercoolers.in

CORPORATE OFFICE
OASIS WFS PVT. LTD.
A-54, Block A, DDA Shed, Okhla
Industrial Area Phase II,
New Delhi - 110020
Ph. : +91 11 45025413
Email: info@oasiswatercoolers.in
Toll Free no. : 1800-309-9668