

**VERSAFILLER PV8SBFSLY**

Manual, Refrigerated, Split-Level, Vandal-Resistant

**VERSAFILLER PVSBFSL**

Manual, Non-Refrigerated, Split-Level, Vandal-Resistant

**Hydration Station Combo****Versafiller PV8SBFSLY**

Delivering 60LPH of 10°C water at 21°C ambient.  
Cooling system uses R-134a refrigerant.

**Versafiller PVSBFSL**

Delivering ambient drinking water.


These surface mount hydration station combos are manually activated. The bottle filler requires a push of the touch-button, while the drinking fountains are activated via the vandal-resistant touch-buttons.

Key Versafiller moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.




| MODEL CODE          | PV8SBFSLY                                                                                      | PVSBFSL |
|---------------------|------------------------------------------------------------------------------------------------|---------|
| ACTIVATION          | Bottle Filler: Manual (Touch-button)<br>Drinking Fountain: Manual (Touch-button)               |         |
| FILTRATION          | Green Filter (optional), Built-in 100 micron strainer                                          |         |
| AUTO-OFF WATER FLOW | No                                                                                             |         |
| DRAINAGE TYPE       | Built in drain, Removable drip tray                                                            |         |
| EXTERIOR CHASSIS    | Antimicrobial ABS Plastic, Brushed Stainless Steel                                             |         |
| DIMENSIONS          | Heavy Duty Galvanised Steel                                                                    |         |
| ALCOVE HEIGHT       | 960(H) x 895(W) x 473(D)                                                                       |         |
| NET WEIGHT          | 43 kg                                                                                          | 27 kg   |
| POWER SUPPLY        | 220-240V, 50/60 Hz                                                                             | -       |
| COOLING PERFORMANCE | 60 LPH Rated Capacity & Base Rate<br>(10°C in 21°C amb. temp.)                                 | -       |
| FULL LOAD AMPS      | 2.2A                                                                                           | -       |
| RATED WATTS         | 450 W                                                                                          | -       |
| ENERGY SYSTEM       | Refrigeration is on only when in use or if water temp increases during long period of standby. | -       |
| COUNTRY OF ORIGIN   | Mexico                                                                                         |         |
| CERTIFICATIONS      | ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS) , WRAS                                 |         |
| WARRANTY            | 1 Year                                                                                         |         |

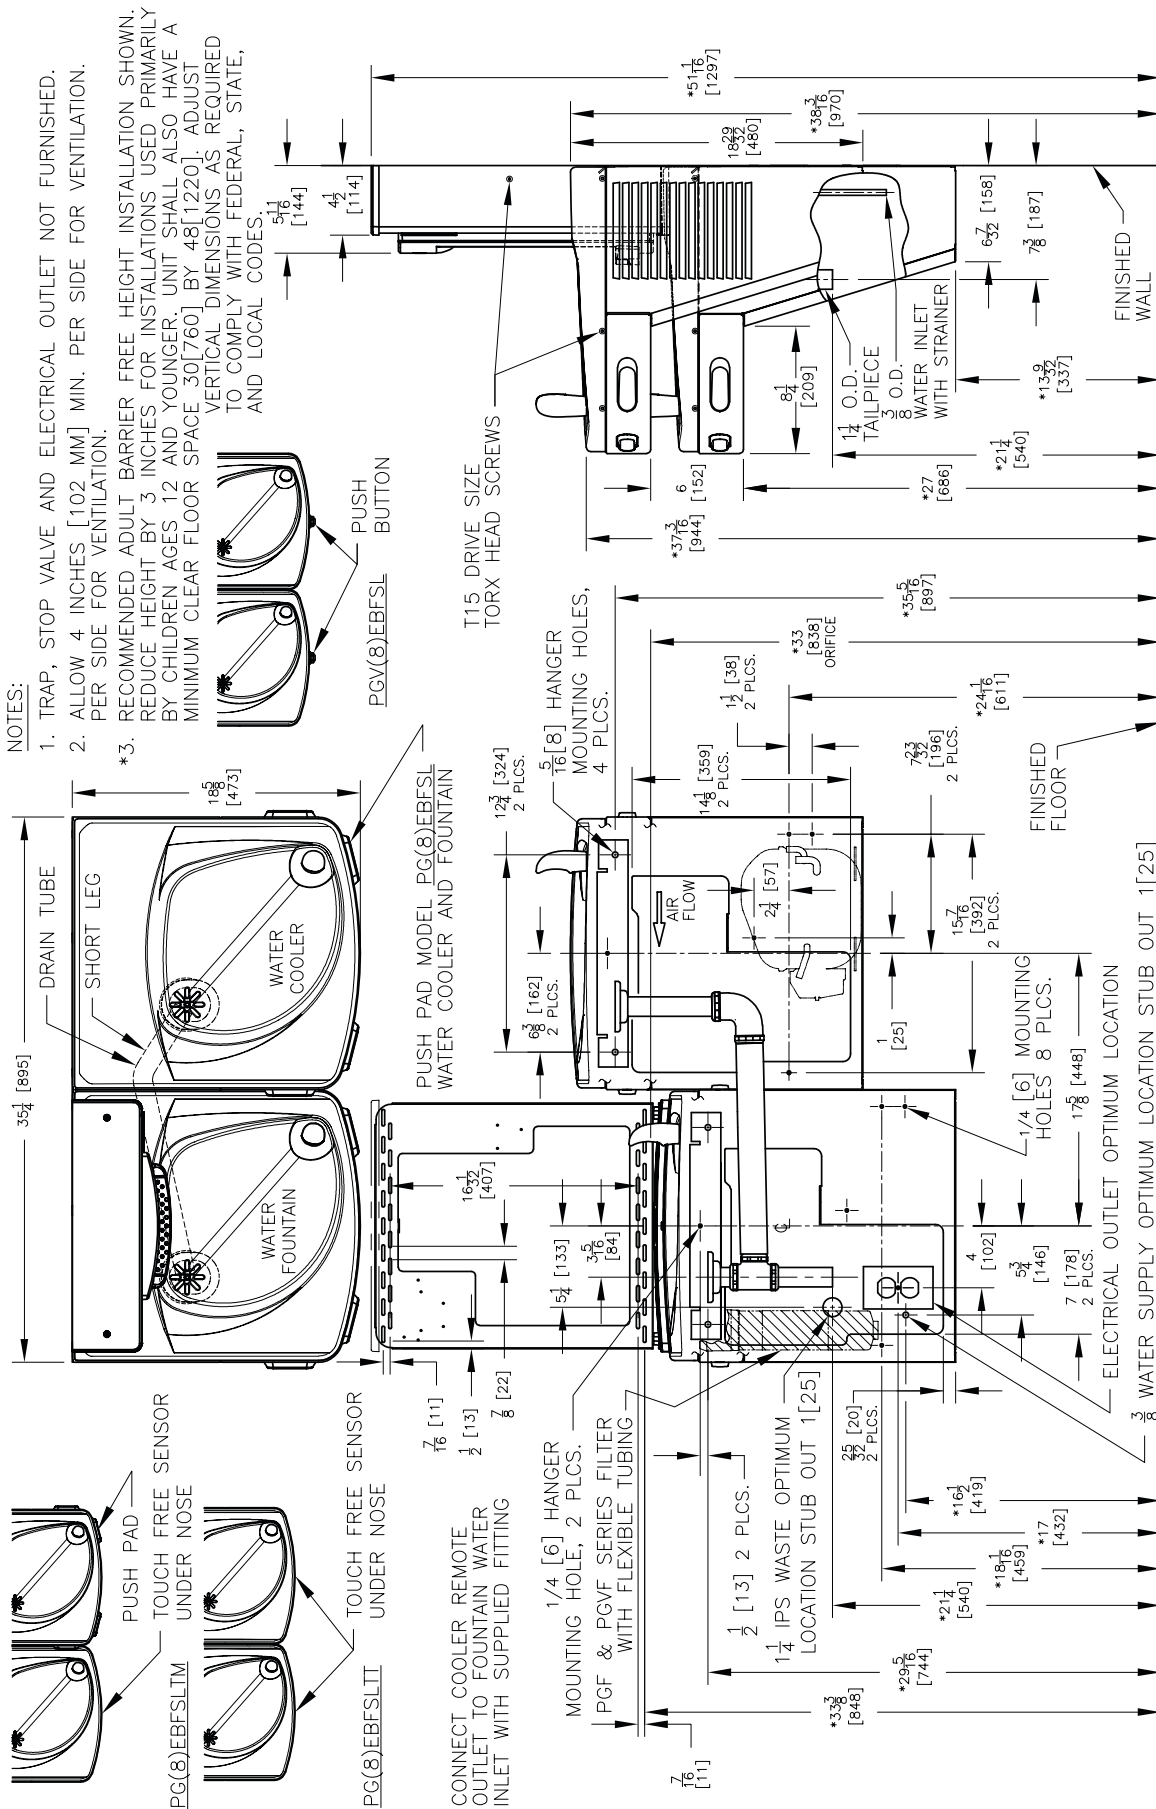

4. 115V GROUNDED NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.
5. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

THIRD ANGLE PROJECTION



ROUGHING-IN AND DIMENSIONAL DRAWING



www.oasiswatercoolers.in  
info@oasiswatercoolers.in

**CORPORATE OFFICE**  
OASIS WFS PVT. LTD.  
A-54, Block A, DDA Shed, Okhla  
Industrial Area Phase II,  
New Delhi - 110020  
Ph. : +91 11 45025413  
Email: info@oasiswatercoolers.in  
Toll Free no. : 1800-309-9668