



VERSACOOLER P8ACSLY ■ Manual, Refrigerated, Split-Level **VERSACOOLER PACSL** ■ Manual, Non-Refrigerated, Split-Level Drinking Fountain

VersaCooler P8ACSLY

Delivering 60LPH of 10°C water at 21°C ambient.
Cooling system uses R-134a refrigerant.

VersaCooler PACSL

Delivering ambient drinking water.




These split-level drinking fountain are manually activated via one of four push-pads.

Key Versacooler moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD, EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.

MODEL CODE	P8ACSLY	PACSL
ACTIVATION	Mechanical (Four push-pads)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
DISINFECTION	Ultra Blu V (optional)	
AUTO-OFF WATER FLOW	No	
DRAINAGE TYPE	Built in drain	
EXTERIOR	Antimicrobial ABS Plastic, Antimicrobial copper touch points, Brushed Stainless Steel	
CHASSIS	Heavy Duty Galvanised Steel	
DIMENSIONS	480(H) x 448(W) x 473(D) mm (each)	
NET WEIGHT	38 kg	13 kg
POWER SUPPLY	220-240V, 50/60 Hz	
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	Non-Refrigerated
FULL LOAD AMPS	2.2A	-
RATED WATTS	450 W	-
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)	
WARRANTY	1 Year	

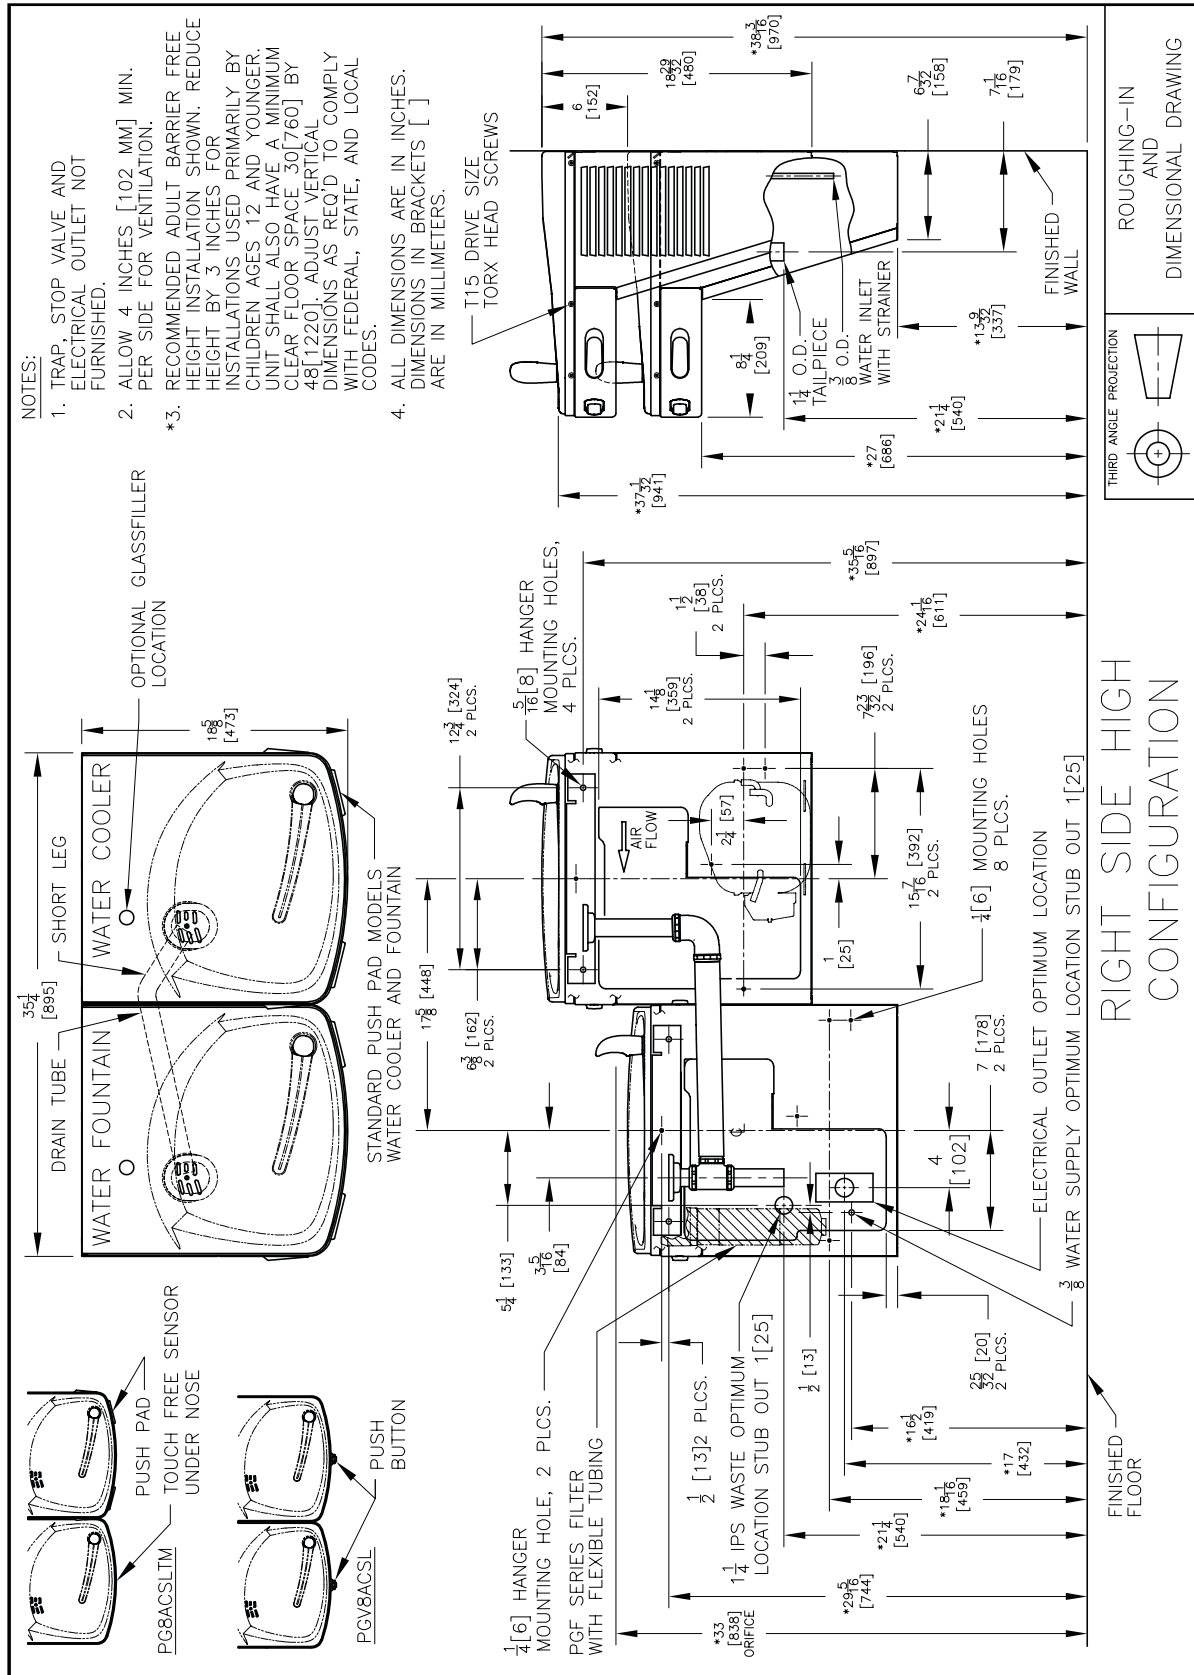

CORPORATE OFFICE

OASIS WFS PVT. LTD.
A-54, Block A, DDA Shed, Okhla
Industrial Area Phase II,
New Delhi - 110020
Ph. : +91 11 45025413
Email: info@oasiswatercoolers.in
Toll Free no. : 1800-309-9668

www.oasiswatercoolers.in
info@oasiswatercoolers.in

